

AS/NZS 2772.2:2016 ASSESSMENT REPORT

For

Pycom Ltd

High Point 9 Sydenham Road, Guildford Surrey GU1 3RX, Surrey, United Kingdom

Tested Model: G01 1.0

| | |
|--|-----------------------------|
| Report Type: Original Report | Product Type: G01 |
| Test Engineer: Max Min | <i>Max Min</i> |
| Report Number: RSHA180108007-00E | |
| Report Date: 2018-02-26 | |
| Reviewed By: RF Leader | <i>Oscar Ye</i> |
| Prepared By: Bay Area Compliance Laboratories Corp. (Kunshan) No.248 Chenghu Road,Kunshan,Jiangsu province,China Tel: +86-0512-86175000 Fax: +86-0512-88934268 www.baclcorp.com.cn | |

Note: This test report is prepared for the customer shown above and for the equipment described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

TABLE OF CONTENTS

| | |
|--|----------|
| GENERAL INFORMATION..... | 3 |
| PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT) | 3 |
| OBJECTIVE | 3 |
| RELATED SUBMITTAL(S)/GRANT(S)..... | 3 |
| TEST METHODOLOGY | 3 |
| EUT EXERCISE SOFTWARE | 3 |
| TEST FACILITY | 3 |
| TECHNICAL REQUIREMENTS SPECIFICATION IN EN 62311..... | 4 |
| TEST DATA | 5 |
| EXHIBIT A - EUT PHOTOGRAPHS..... | 6 |
| EUT – WITH EXPANSION BOARD VIEW..... | 6 |
| EUT – TOP VIEW | 6 |
| EUT – SHIELDING OFF VIEW..... | 7 |
| EUT –BOTTOM VIEW..... | 7 |

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

| | |
|--------------|------------------------------|
| Applicant | Pycom Ltd |
| Tested Model | G01 1.0 |
| Product Type | G01 |
| Dimension | 55mm (L)* 20 mm (W)*10 mm(H) |
| Power Supply | DC 3.3V |

**All measurement and test data in this report was gathered from production sample serial number: 20180108004.
(Assigned by the BACL. The EUT supplied by the applicant was received on 2018-01-08)*

Objective

This report is prepared on behalf of *Pycom Ltd* in accordance with EN 62311:2008, Generic standard to demonstrate the compliance of electronic and electrical apparatus with the basic restrictions related to human exposure to electromagnetic fields (0 Hz–300 GHz) is to demonstrate the compliance of apparatus with the basic restrictions or reference levels on exposure of the general public related to electric, magnetic, electromagnetic fields as well as induced and contact current.

The objective is to determine the compliance of EUT with EN 62311:2008.

Related Submittal(s)/Grant(s)

No related submittal(s).

Test Methodology

All measurements contained in this report were conducted with EN 62311:2008.

EUT Exercise Software

No exercise software was used.

Test Facility

The test site used by Bay Area Compliance Laboratories Corp. (Kunshan) to collect test data is located on the No.248 Chenghu Road, Kunshan, Jiangsu province, China.

Bay Area Compliance Laboratories Corp. (Kunshan) Lab is accredited to ISO/IEC 17025 by A2LA (Lab code: 4323.01) and the FCC designation No. CN1185 under the FCC KDB 974614 D01. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2014.

Technical Requirements Specification in EN 62311

General Description of Applied Standards

EN 62311 Generic standard to demonstrate the compliance of electronic and electrical apparatus with the basic restrictions related to human exposure to electromagnetic fields (0 Hz–300 GHz) is to demonstrate the compliance of apparatus with the basic restrictions or reference levels on exposure of the general public related to electric, magnetic, electromagnetic fields as well as induced and contact current.

RF Exposure Evaluation

Limit:

According to EN 62311, the criteria listed in the below table shall be used to evaluate the environmental impact of human exposure to radio-frequency (RF) radiation as specified table 2 of Council Recommendation 1999/519/EC.

Reference levels for electric, magnetic and electromagnetic fields
(0 Hz to 300 GHz, unperturbed rms values)

| Frequency range | E-field strength (V/m) | H-field strength (A/m) | B-field (μT) | Equivalent plane wave power density S_{eq} (W/m ²) |
|-----------------|------------------------|------------------------|---------------------|--|
| 0-1 Hz | — | $3,2 \times 10^4$ | 4×10^4 | — |
| 1-8 Hz | 10 000 | $3,2 \times 10^4/f^2$ | $4 \times 10^4/f^2$ | — |
| 8-25 Hz | 10 000 | $4\,000/f$ | $5\,000/f$ | — |
| 0,025-0,8 kHz | $250/f$ | $4/f$ | $5/f$ | — |
| 0,8-3 kHz | $250/f$ | 5 | 6,25 | — |
| 3-150 kHz | 87 | 5 | 6,25 | — |
| 0,15-1 MHz | 87 | $0,73/f$ | $0,92/f$ | — |
| 1-10 MHz | $87/f^{1/2}$ | $0,73/f$ | $0,92/f$ | — |
| 10-400 MHz | 28 | 0,073 | 0,092 | 2 |
| 400-2 000 MHz | $1,375\ f^{1/2}$ | $0,0037\ f^{1/2}$ | $0,0046\ f^{1/2}$ | $f/200$ |
| 2-300 GHz | 61 | 0,16 | 0,20 | 10 |

Notes:

1. f as indicated in the frequency range column.

Test method

The antenna of the product, under normal use condition is at least 20cm away from the body of the user. Warning statement of the user for keeping 20cm separation distance and the prohibition of operating to a person has been printed on the user manual. So, this product under normal use is located on electromagnetic far field between the human body.

Far Field Calculation Formula

$$E = \frac{\sqrt{30PG(\theta, \phi)}}{r}$$

G = antenna gain relative to an isotropic antenna
 θ, ϕ = elevation and azimuth angles to point of investigation
 r = distance from observation point to the antenna

Test Data

Environmental Conditions

| | |
|--------------------|-----------|
| Temperature: | 24.1 °C |
| Relative Humidity: | 50 % |
| ATM Pressure: | 101.0 kPa |

The testing was performed by Max Min on 2018-02-07.

| Function | Frequency Range (MHz) | EIRP (dBm) | EIRP (mW) | E-Field Strength (V/m) | E-Field Limit (V/m) | Result |
|----------|-----------------------|------------|-----------|------------------------|---------------------|--------|
| Wi-Fi | 2412-2472 | 16.61 | 45.81 | 5.86 | 61.00 | Pass |
| BT3.0 | 2402-2480 | 5.41 | 3.48 | 1.62 | 61.00 | Pass |
| BLE | 2402-2480 | 6.01 | 3.99 | 1.73 | 61.00 | Pass |


| Function | Frequency Range (MHz) | Conducted Output Power (dBm) | Conducted Output Power (mW) | E-Field Strength (V/m) | E-Field Limit (V/m) | Result |
|---------------|-----------------------|------------------------------|-----------------------------|------------------------|---------------------|--------|
| FDD (Band 3) | 1710-1785 | 23.36 | 216.77 | 16.43 | 56.86 | Pass |
| FDD (Band 20) | 832-862 | 23.25 | 211.35 | 16.22 | 56.86 | Pass |
| FDD (Band 28) | 703-748 | 23.26 | 211.84 | 16.24 | 56.86 | Pass |

Note: Antenna Gain (numeric): 1.3 dBi (1.35) for Wi-Fi, BLE & BT3.0; 2.2dBi (1.66) for FDD Band 3, band 20 & band 28.


The distance from observation point to the antenna is 20cm.

EXHIBIT A - EUT PHOTOGRAPHS


EUT – with Expansion Board View

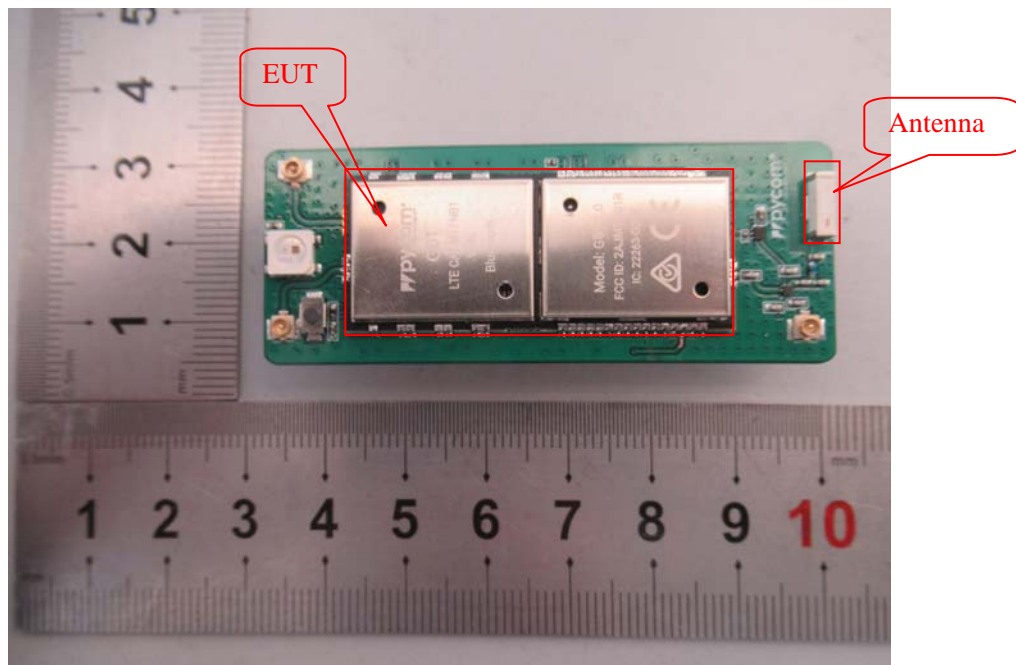


EUT – Top View

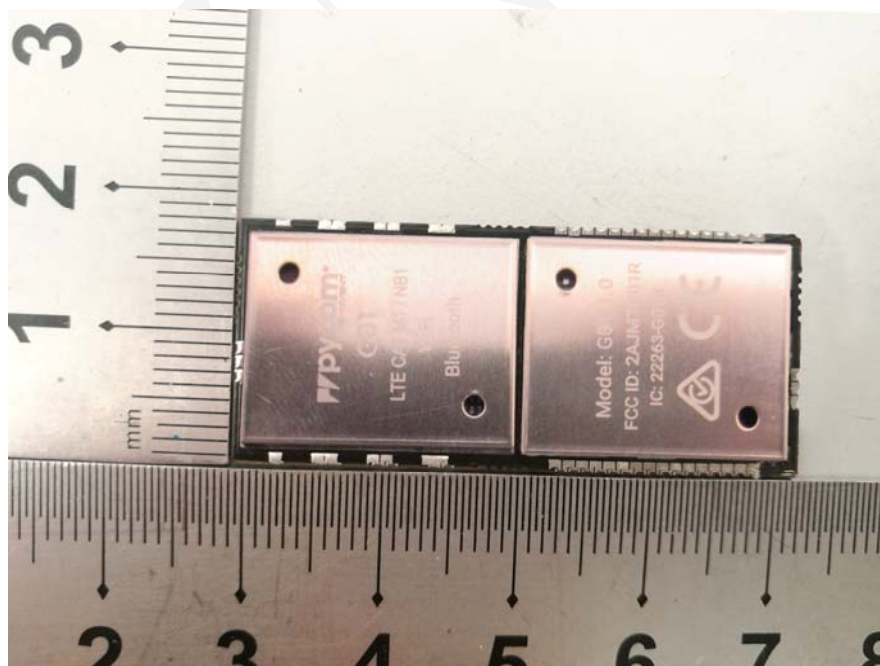

EUT – Shielding off View

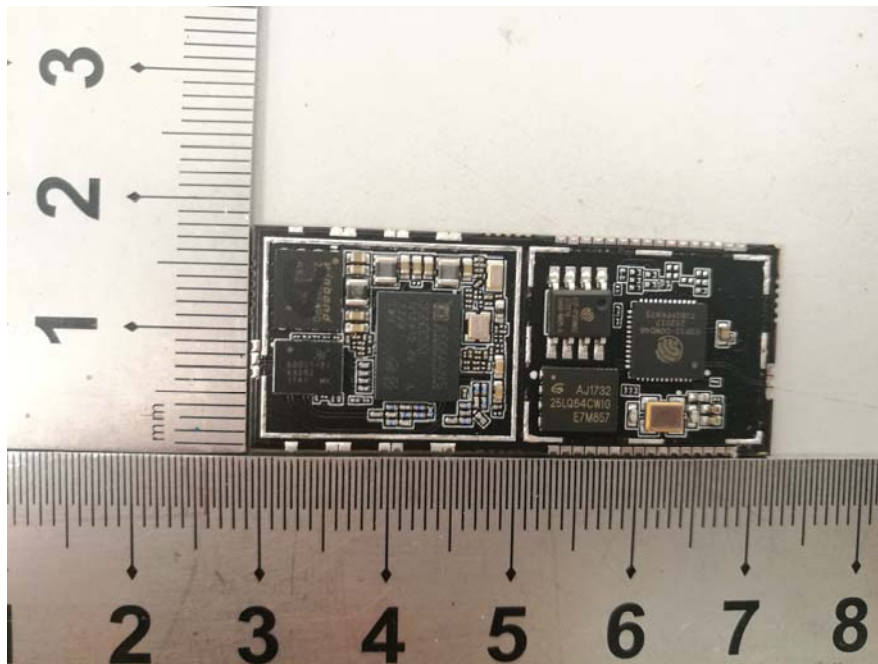

EUT –Bottom View

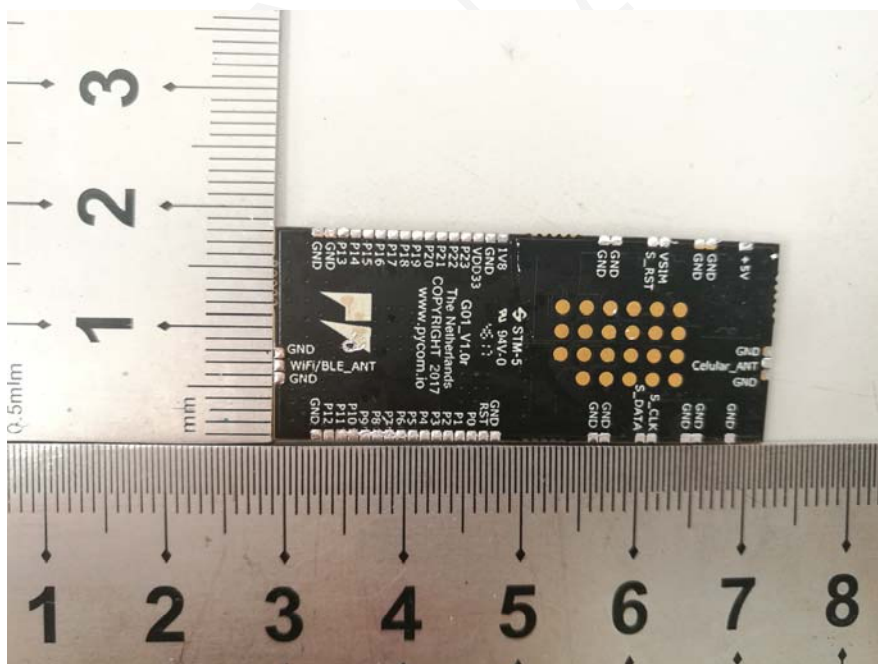

******* END OF REPORT *******